
0.001g Balance



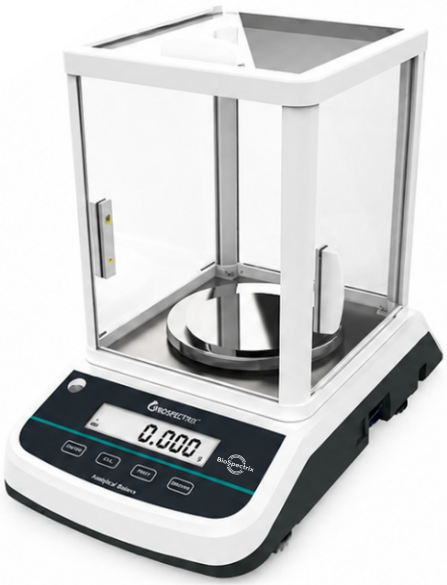

- Dual screen display
- Unit conversion
- Multi-device printing
  Standard RS232 interface
- Full electromagnetic
  interference protection

TECHNICAL DATA

Model	BSFA2003S	BSFA3003S	BSFA5003S
Max Capacity	200g	300g	500g
Min Readout	20mg		
Accuracy	0.001g		
Repeatability	±0.002g		
Linearity Error	±0.002g		
Stability Time	≤ 3S		
Working Temp	15°C ~ 35°C		
Pan Size	Φ120mm		
Dimensions	300 × 200 × 295 mm		
Calibration Mode	External calibration		
Communication Interface	RS232 (USB interface optional)		